


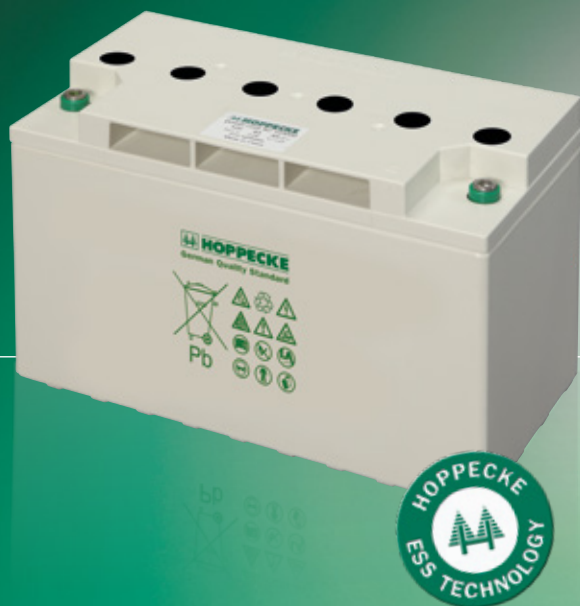

Similar to the illustration

power.com XC

Series AGM ESS

Valve regulated lead-acid batteries

Typical applications:

- Uninterruptible power supply (UPS)
- Telecommunications
 - Mobile phone stations
 - BTS-stations
 - Off-grid/on-grid solutions
- Power supply systems
- Emergency lighting

Your benefits:

- Maintenance-free regarding water refilling – due to innovative Gel-ESS technology
- Excellent high-current capability – low investment costs due to innovative electrode structure
- Optimal space utilization – due to horizontal arrangement
- Optimum operational safety – integrated backfire protection and central degassing system
- Higher short-circuit safety even during the installation – based on HOPPECKE system connectors
- Easy assembly and installation – battery lid with integral handle*


Type overview **power.com** XC

Capacities, dimensions and weights

Type	$C_{10}/1.80\text{ V}$ Ah	$C_5/1.77\text{ V}$ Ah	$C_3/1.75\text{ V}$ Ah	$C_1/1.70\text{ V}$ Ah	$C_{1/2}/1.65\text{ V}$ Ah	$C_{1/6}/1.60\text{ V}$ Ah	Weight kg	Length L mm	Width W mm	Height H mm	Fig.
power.com XC 121300	51	48	44	36	31	22	22.0	229	177	230	A
power.com XC 121700	64	60	55	45	38	28	22.6	229	177	230	A
power.com XC 122100	66	64	60	52	46	36	25.5	229	177	230	A
power.com XC 122600	86	82	78	66	57	42	35.1	344	177	230	B
power.com XC 123000	99	94	89	76	65	48	35.7	344	177	230	B
power.com XC 123400	104	100	95	81	73	56	38.7	344	177	230	B
power.com XC 124100	146	137	126	102	88	63	48.6	498	177	230	C
power.com XC 124400	152	142	132	110	95	69	51.3	498	177	230	C
power.com XC 125100	157	151	141	121	108	81	55.9	498	177	230	C
power.com XC 21100	236	218	205	173	147	96	13.5	88,5	181	310	D
power.com XC 21600	360	329	309	257	220	150	20.2	181	127	310	E
power.com XC 21900	435	398	371	302	264	189	24.6	181	154	310	E
power.com XC 22700	655	604	563	459	389	259	35.6	181	225	310	F


C_{10} , C_5 , C_3 , C_1 , $C_{1/2}$ and $C_{1/6}$ = Capacity at 10 h, 5 h, 3 h, 1 h, 1/2 h and 1/6 h discharge

Fig. A




power.com XC 121300 -
power.com XC 122100

Fig. B




power.com XC 122600 -
power.com XC 123400

Fig. C

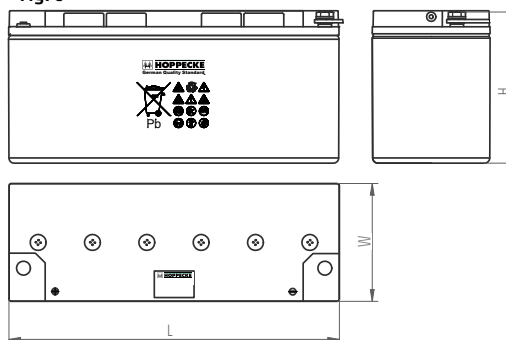


power.com XC 124100 -
power.com XC 125100

Fig. D




power.com XC 21100

Fig. E

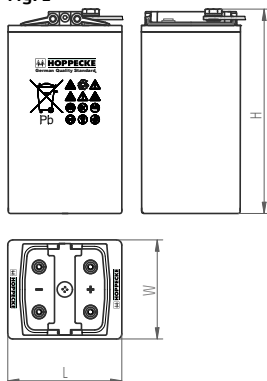

power.com XC 21600 -
power.com XC 21900

Fig. F

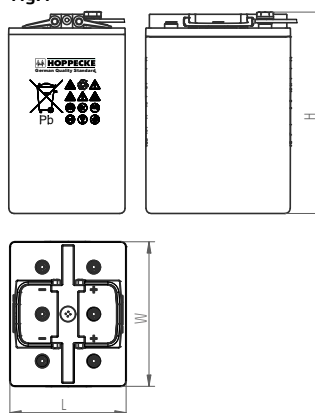

power.com XC 22700

Design life: 10-12 years (according to EUROBAT)

Optimal environmental compatibility – closed loop for recovery of materials in an accredited recycling system

